



## **SPÄNEX SMU compact dust extractors**

... with volume flows up to 10,000 m<sup>3</sup>/h!

# Compact, powerful and quiet

Extraction systems with compact dust extractors up to 10,000 m<sup>3</sup>/h

The area of application of the dust extractors has been expanded based on the new EN 16770. Thus, in the future, dust extractors with volume flows of more than 6,000 m<sup>3</sup>/h can be set up directly in the work room due to its structural design when extracting organic dust, dust explosion class St 1. The advantages of extraction systems based on dust extractors benefit an even greater group of users:

- Shorter pipeline distances reduce investment and operating costs.
- Complicated return air ducts are not required.
- A one-hundred percent heat recovery is achieved due to direct air return.
- The mostly ready for operation supply results in short assembly times and thus low assembly costs.

The SPÄNEX compact dust extractors also impress with higher capacity, best energy efficiency, quieter operation and better usability.

## Characteristic features

### ■ High extraction capacity

The SPÄNEX compact dust extractors now cover a volume flow range of up to 10,000 m<sup>3</sup>/h. In addition, the flow rate of the devices is optimized so the internal resistances are lower and thus higher external pressures are available. That means: the performance capacity of the complete compact dust extractor model range is impressive.

### ■ Lower energy consumption

As a standard, energy-saving fan motors in efficiency class IE 3 (optionally IE 4) are used. Especially for the more powerful devices, a drive via a frequency transformer to control the fan speed is an option worth considering with respect to saving costs.

### ■ Quiet operation

The noise protection has also been improved so the noise emissions were able to be reduced. Additional external silencers are not required.

### ■ Effective filters and cleaning technology

The high separation level of the filter materials (tested by the trade association) ensures a residual dust content in the return air of < 0.1 mg/m<sup>3</sup>. The compressed air cleaning system (jet pulse system) ensures effective and gentle cleaning of the filter elements at low compressed air consumption levels, thus achieving a long service life. The dust extractors type SMU-R are cleaned by a vibration motor (motor power: 45 W).

### ■ Modern design, compact unit

The new design and the structural design in conjunction with the use of the tried-and-tested, special filter elements have resulted in even more compact casing dimensions so extremely small set-up areas and lower clearance heights are required.

### ■ Tested safety


All SPÄNEX compact dust extractors have been tested by the trade association and have been issued the DGUV test certificate (H3) and the GS mark.

### ■ Several disposal options

The separated chips or dusts are collected in collection containers lined with plastic bags. The SMU 32 up to the SMU 100 compact dust extractor models can alternatively be equipped with a briquetting press or connected to a screw or pneumatic conveyor system with an outdoor positioned container.

# Sample solutions from practice



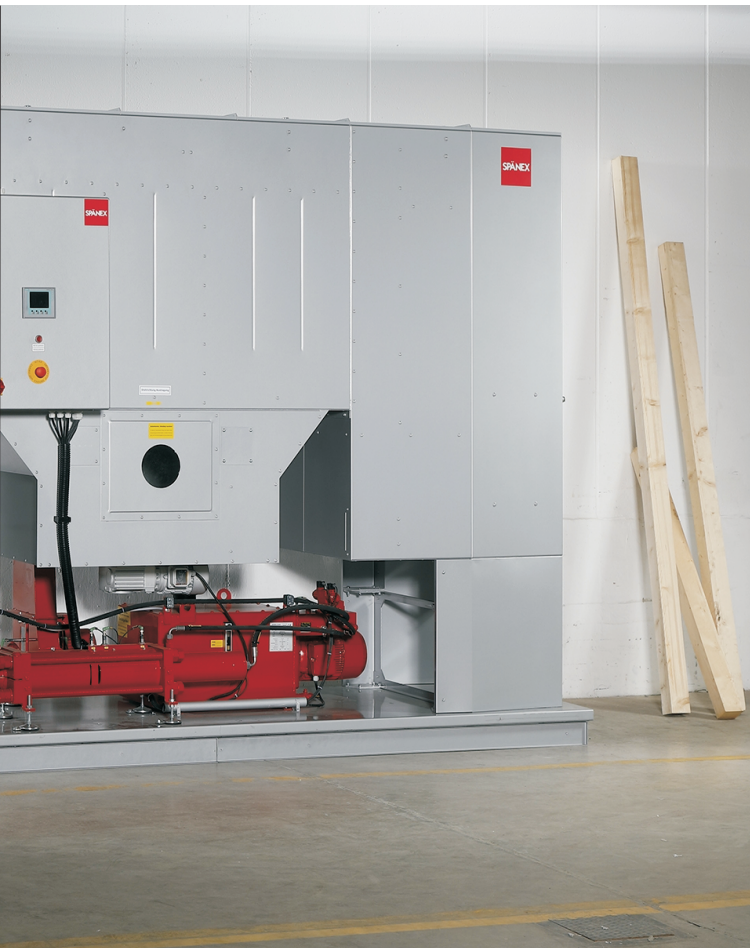

# Compact, powerful and quiet

## Overview of the data



SMU 12 - 30



SMU 32 - 45

SMU	R 12	R 15	R 20 / 20	25	30	32	45
Suction nozzles Ø in mm	125	140	160	180	200	200	250
Nominal volume flow* in m³/h	880	1.110	1.450	1.830	2.260	2.260	3.530
Volume flow ** in m³/h	1.200	1.500	2.000	2.500	3.000	3.200	4.500
Vacuum * in Pa	2.400	2.100	2.400 / 2.700	2.500	2.400	2.700	2.700
Motor capacity in kW	2,2	2,2	3,0	3,0	4,0	4,0	5,5
Max. noise emissions in dB (A)	65	65	65	65	65	67	67
Collection volume in l	1 x 165	1 x 165	1 x 165	1 x 165	1 x 165	2 x 165 400***	2 x 165 400***
Dimensions L x W x H	1320 x 750 x 1905	1320 x 750 x 1905	1670 x 750 x 1975	1860 x 750 x 1975	1860 x 750 x 1975	2420 x 900 x 1965 2360 x 900 x 2400***	2540 x 900 x 1965 2480 x 900 x 2400***
Weight in kg	340	345	385	390	400	680 1.295***	705 1.320***

\* at 20 m/s in the suction nozzle; \*\* standard application at 24 - 28 m/s in the suction nozzle; \*\*\* with briquetting press

### Design configurations:

- Automatic start of the fan
- Automatic slide control
- Operation via frequency transformer
- Fill level monitoring in the containers with briquette presses or container feeding
- With chip briquetting press or externally installed container
- Automated extinguishing with powder extinguisher
- Ignition protection system

### Plus points:

- Compactness
  - Small set-up area
  - Low clearance height
- High suction capacity
- Quiet, energy-saving operation
- Automatic start-up of the briquetting press
- Complete control system
- Operator friendliness
- Tested in accordance with GS-HO-07

# Compact, powerful and quiet

## Overview of the data



SMU 60 - 100  
with filling bins



SMU 60 - 100  
with briquetting press

SMU	60	70	85	100
Suction nozzles Ø in mm	300	315	355	355
Nominal volume flow* in m³/h	5.090	5.610	7.130	7.130
Volume flow ** in m³/h	6.000	7.000	8.500	10.000
Vacuum * in Pa	2.500	2.800	2.700	3.000
Motor capacity in kW	7,5	11,0	11,0	15,0
Max. noise emissions in dB (A)	69	70	70	72
Collection volume in l	3 x 165 500***	3 x 165 500***	3 x 165 500***	3 x 165 500***
Dimensions L x W x H	3080x900x1965 3010x900x2400***	3220x900x1965 3150x900x2400***	3570x900x1965 3500x900x2400***	3570x900x1965 3500x900x2400***
Weight in kg	850 1.465***	880 1.495***	900 1.515***	930 1.545***

\* at 20 m/s in the suction nozzle; \*\* standard application at 24 - 28 m/s in the suction nozzle; \*\*\* with briquetting press

### Tested safety



### Consultation and service

It's a long way from planning to the finished system. In all phases, SPÄNEX is at your side with the competence and experience from the realization of several thousand projects.

The systems are installed by SPÄNEX installation technicians and commissioned by our customer service technicians. Our service, upon request in conjunction with maintenance agreements, ensures the long service life and reliable operation of the systems.

## SPÄNEX GmbH

Luft-, Energie- und Umwelttechnik  
Otto-Brenner-Straße 6  
D-37170 Uslar  
Phone: +49 (0) 5571 304-0  
Fax: +49 (0) 5571 304-111  
info@spaenex.de  
www.spaenex.de

safe ■ clean ■ efficient ■